

MTS TOOS designs and produces the highest quality traveling blocks

MTS TOOS Traveling Blocks are available in multiple weight sizes and load ratings to fit your drilling operation's requirements.

MTS TOOS Traveling Blocks include the largest sizes used in the drilling industry. MTS TOOS Traveling Block's API sheaves, with hardened grooves, are independently mounted on tapered roller bearings.

Additionally, MTS TOOS Traveling Blocks can be furnished unitized with a hook to provide a short, compact design.


MTS TOOS Traveling Blocks Type H traveling blocks are offered with five sheave sizes and five load ratings. The sheaves are independently mounted on double-row tapered bearings which minimize friction. Flame-hardened rope grooves in the sheaves are machined in accordance with API recommendations and each sheave is a 3-piece steel forging rim assuring longer sheave life and elimination of cracks.

MTS-TOOS.COM

Traveling Block ISO 13535 Certified



Management, Procurement & Construction

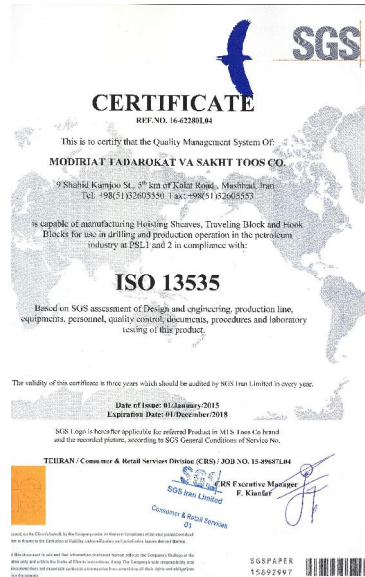


MTS Toos co.

Through its subsidiaries and affiliates, is a leading provider of engineering and construction services, technology products and integrated solutions.

MTS 760 TB 650

## MTS TOOS TRAVELING BLOCK SPECIFICATION

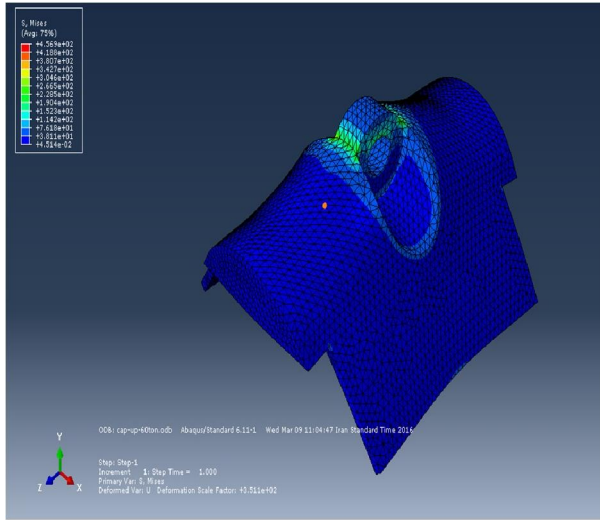

### Features/Benefits

- Heavy steel fabricated main frame
- Heavy wireline guards
- Steel sheaves with flame hardened API wireline grooves
- Tapered roller bearings in sheaves
- Oil quenched and tempered alloy steel pin with individual grease passages to each center pin bearing
- High strength steel becket
- Designed to API Standard 8A

Model	Load Capacity	# of Sheaves	Approx. Weight
424SHB-100	110.3 ton (100 mT)	4	5,700 lb (2,586 kg)
436TB-150	150 ton (136.1 mT)	4	6,000 lb (2,722 kg)
536TB-250	250 ton (226.8 mT)	5	6,450 lb (2,926 kg)
542TB-350	350 ton (317.5 mT)	5	8,575 lb (3,890 kg)
650TB-400	400 ton (362.9 mT)	6	13,525 lb (6,135 kg)
650TB-500	500 ton (453.6 mT)	6	15,725 lb (7,133 kg)
660TB-500	500 ton (453.6 mT)	6	17,000 lb (7,711 kg)
760TB-650	650 ton (589.7 mT)	7	20,250 lb (9,185 kg)
760TB-750	750 ton (680.4 mT)	7	21,500 lb (9,752 kg)
860TB-1000	1,000 ton (907.2 mT)	8	33,325 lb (15,116 kg)
872TB-1250	1,250 ton (1,134 mT)	8	43,750 lb (19,845 kg)

We believe in  
**service above all**

since our singular goal is to move our customers' business forward. This drives us to anticipate our customers' needs and work with them to deliver the finest products and services on time and on budget.

### Key client

National Iranian Drilling Co.

Kala Naft

PKMS

### In the vendor list:

NISOC

NDC

Tadbir Drilling Co

MAPNA Drilling Co

Dana Drilling Co

Tasdid Co

### Contact Us

**Tel: +985132605550-3**

**+986133310305**

**+989379876125**

**mts\_toosco@yahoo.com**

**Info@mts-toos.com**